


SPECIFICATIONS

| | |
|--------------------------------|---|
| General | The PIM Shield Multi-Function Snap-in Adapter provides a low passive intermodulation method to support one stack of snap-in style cable hangers in high-risk PIM zones. |
| Mounting | Secure the Snap-in Adapter to existing round or angle member using PIM Shield Cable Strap (900443-16-50 or 900443-27-25) or equivalent. |
| Round Member Attachment | 2.37-inch minimum outside diameter |
| Angle Member Attachment | 0.25-inch maximum angle flange thickness |
| System PIM Performance | IM3 <-100 dBm when tested in accordance with proposed IEC 62037-8, near field test, 2x 20W test tones, while subjected to dynamic stimulus. |
| Material | UV Stable, glass filled Nylon |
| Operating Temperature | -40°C to +70°C |
| Case Dimensions | 12.5-inch x 9.5-inch x 7-inch |
| Case Weight | 7.1 Lbs. |
| Qty. Per Case | 10 |


1X SNAP-IN LAUNCH



Patent Pending design allows secure attachment to round or angle members at cell sites.

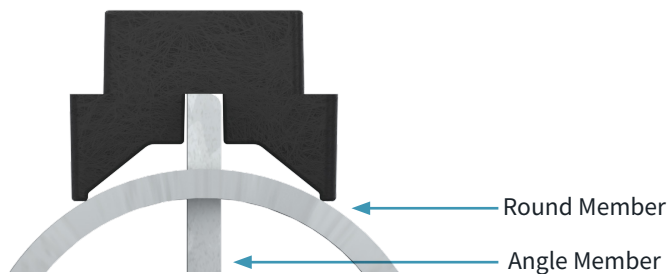


STEP 1: Secure Snap-in Support Base to a round or angle member using Cable Strap(s) (PN's: 900443-16-50 or 900443-27-25). Use Strap Tensioning tool (900442 or equivalent) to tighten Cable Strap(s). Trim Strap(s) flush to Locking Head.

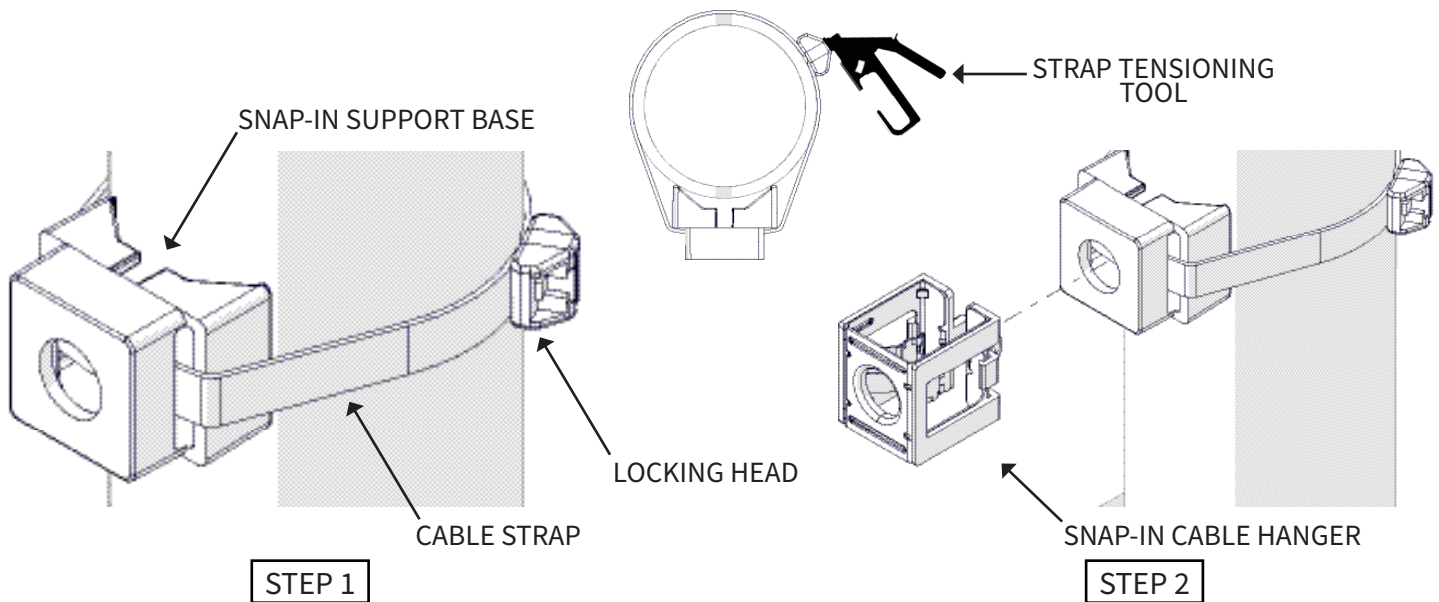

STEP 2: Install low PIM stackable Snap-in Cable Hangers (sold separately, PN's: PSHS-xxxx-10 or PSPS-xxx-10) as required into mounting hole provided. Maximum stack height = 3.

STEP 1: Secure Snap-in Support Base to a round or angle member using Cable Strap(s) (PN's: 900443-16-50 or 900443-27-25). Use Strap Tensioning tool (900442 or equivalent) to tighten Cable Strap(s). Trim Strap(s) flush to Locking Head.

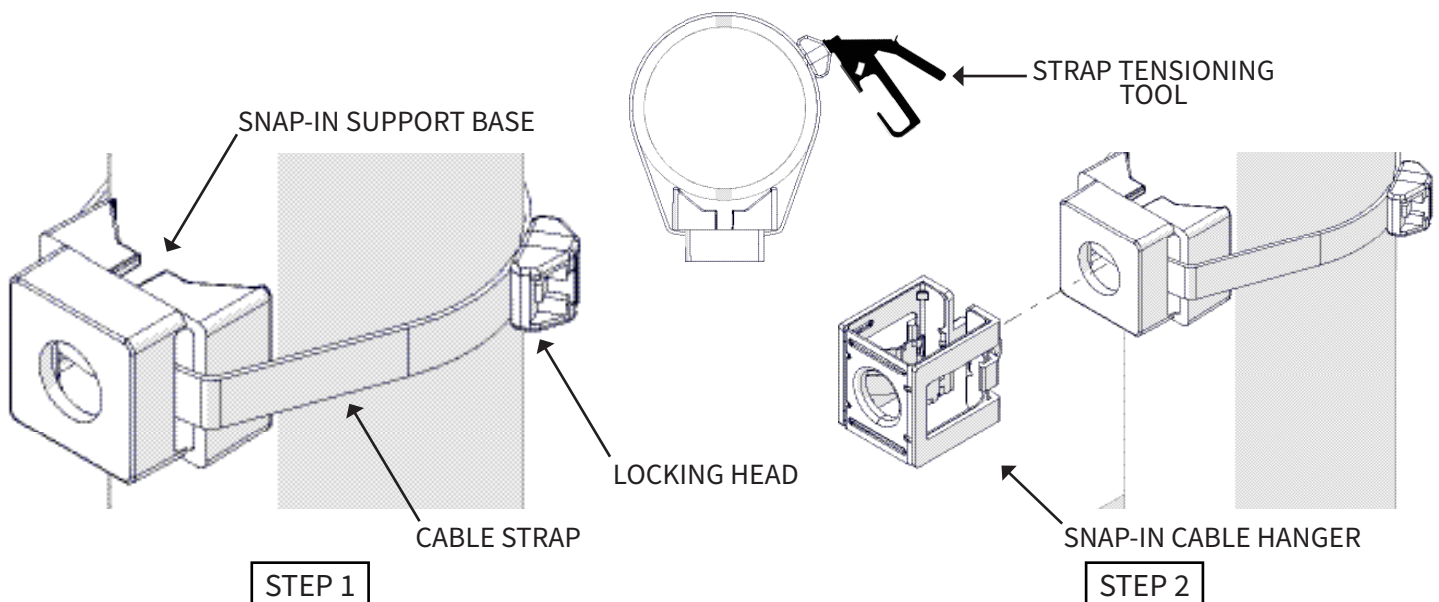

STEP 2: Install low PIM stackable Snap-in Cable Hangers (sold separately, PN's: PSHS-xxxx-10 or PSPS-xxx-10) as required into mounting hole provided. Maximum stack height = 3.