


GxxR: Galvanized Threaded Rods

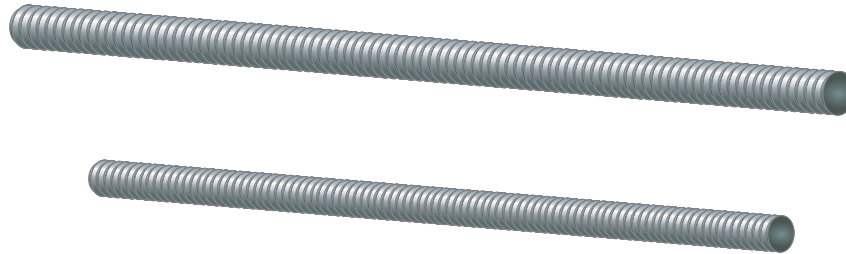

Features:

- Available in cut lengths, or 6' sections.

Design Criteria:

- Conforms to the minimum requirements as stated in SAE J429 (Latest Revision), Rolled or Cut CNC Threads
- 1/2" and under meet SAE J429 Grade 2 (Yield F₅ = 57 KSI / Tensile F_u = 74 ksi)
- Over 1/2" meets SAE J429 Grade 5 (Yield F_y = 92 ksi / Tensile F_u = 120 ksi)
- All finished goods are Hot Dip Galvanized in accordance with ASTM A123 requirements.

Part #	Diameter	Length
G38R-12	3/8"	12"
G38R-72	3/8"	72"
G12R-6	1/2"	6"
G12R-8	1/2"	8"
G12R-10	1/2"	10"
G12R-12	1/2"	12"
G12R-20	1/2"	20"
G12R-24	1/2"	24"
G12R-72	1/2"	72"
G58R-8	5/8"	8"
G58R-10	5/8"	10"
G58R-12	5/8"	12"
G58R-14	5/8"	14"
G58R-18	5/8"	18"
G58R-24	5/8"	24"
G58R-48	5/8"	48"
G58R-72	5/8"	72"
G34R-72	3/4"	72"