

	PARTS LIST												
	ITEM	QTY	PART NO.	PART DESCRIPTION	LENGTH	UNIT WT.	NET WT.						
	1	4	X-STU	STIFF ARM CHANNEL BRACKET	8 1/2 in	1.37	5.49						
	2	2	X-232697	TRPD-HD DIAGONAL ANGLE - SITE PRO 1	52 1/2 in	14.35	28.69						
	3	1	CFS	LOWER GATE FOOT WELDMENT		12.72	12.72						
	4	1	GBB	GATE BACKING BAR	11 1/2 in	4.53	4.53						
	5	2	SHCM-T	CHAIN MOUNT TIGHTENER BRACKET	3 in	1.86	3.72						
	6	4	G12R-15	1/2" x 15" THREADED ROD (HDG.)		0.40	1.60						
	6	4	G12R-12	1/2" x 12" THREADED ROD (HDG.)		0.40	1.60						
	7	1	G12R-6	1/2" x 6" GALV. THREADED ROD		0.33	0.33						
	8	4	G12065	1/2" x 6-1/2" HDG HEX BOLT GR5 FULL THREAD	6 1/2 in	0.41	1.64						
	9	4	G12112	1/2" x 1-1/2" HDG HEX BOLT GR5	1/2 in	0.15	0.59						
	10	16	G12FW	1/2" HDG USS FLATWASHER	3/32 in	0.03	0.55						
	11	18	G12LW	1/2" HDG LOCKWASHER	1/8 in	0.01	0.25						
	12	20	G12NUT	1/2" HDG HEAVY 2H HEX NUT		0.07	1.43						
_						TOTAL WT. #	65.66						

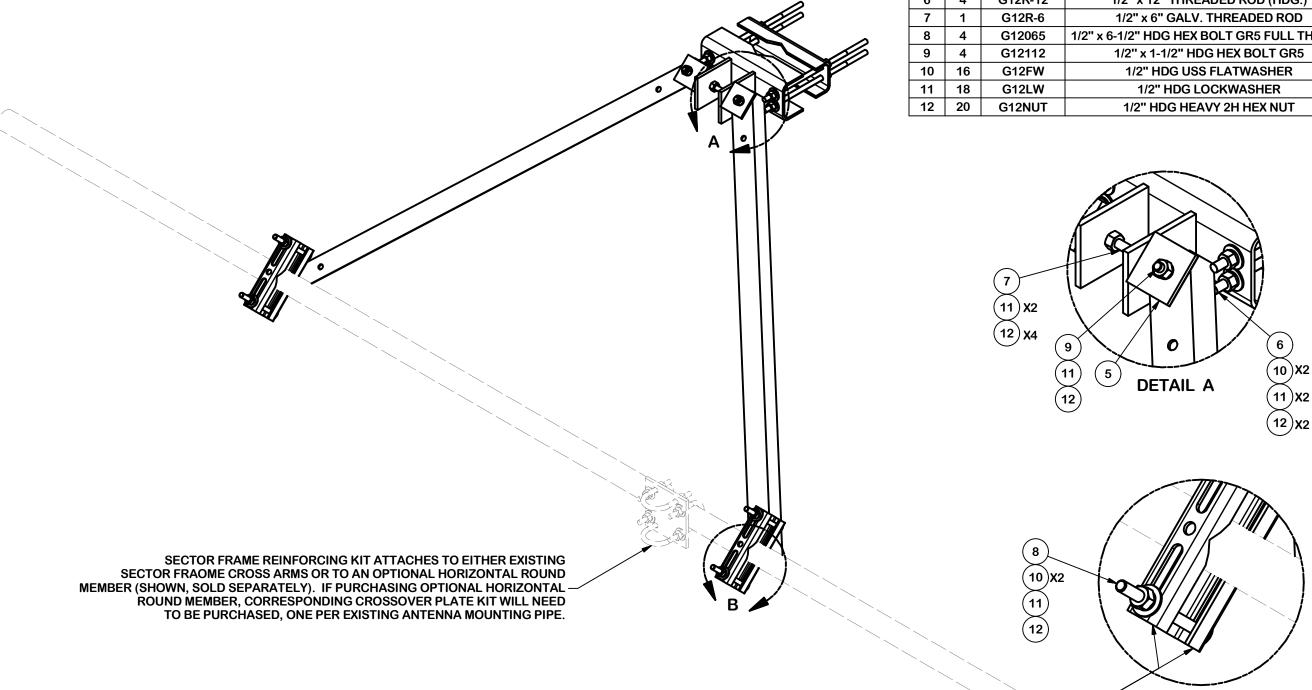



					TOLERANCE NOTES	DESCRIPTION					
				TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS ARE ± 1/2 DEGREE			SECTOR FRAI STABILIZER - VER				
			ALL OTHER MACHINING (± 0.030")	CPD N		DRAWN BY	ENG. APPRO				
Α	CHANGED MAX. DIA. FOR HANDRAIL CONNECTION	BC	10/25/2017	ALL OTHER ASSEMBLY (± 0.060")	5563		CEK 4/29/2014				
REV					PROPRIETARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT			DRAWING USAGE	CHECKED BY		
	REVISION HISTORY			•	INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	81	01	CUSTOMER	BMC 4		

DETAIL B


(1)

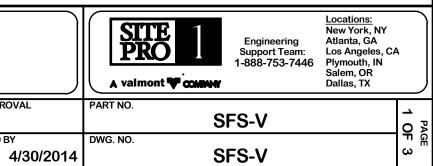


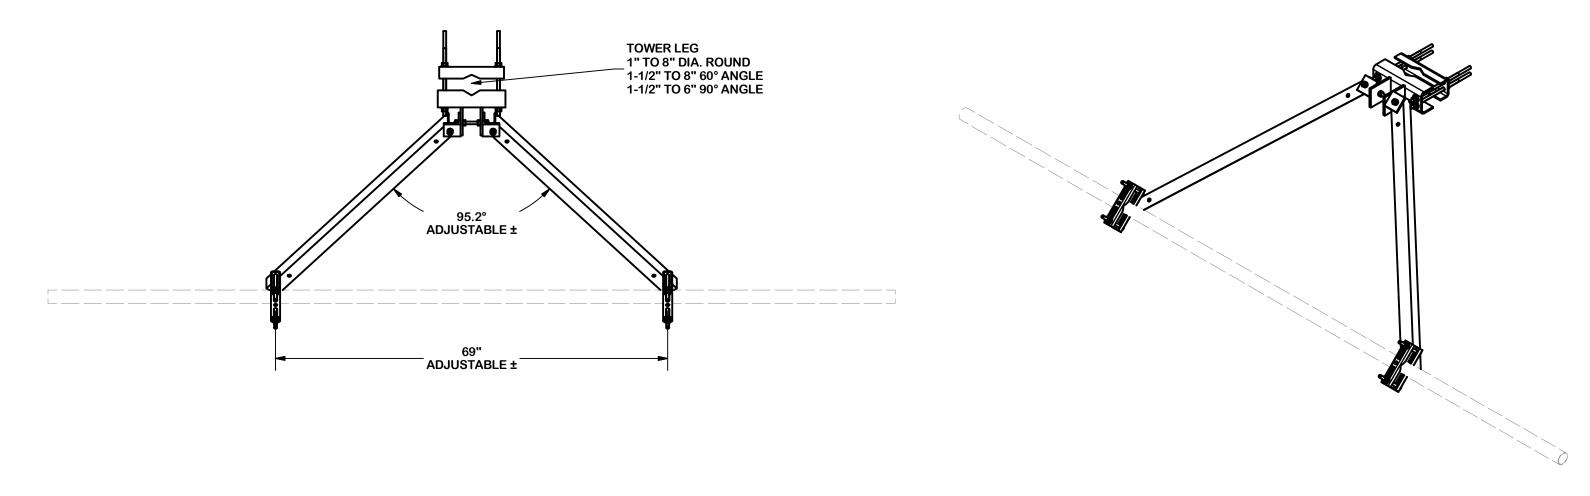


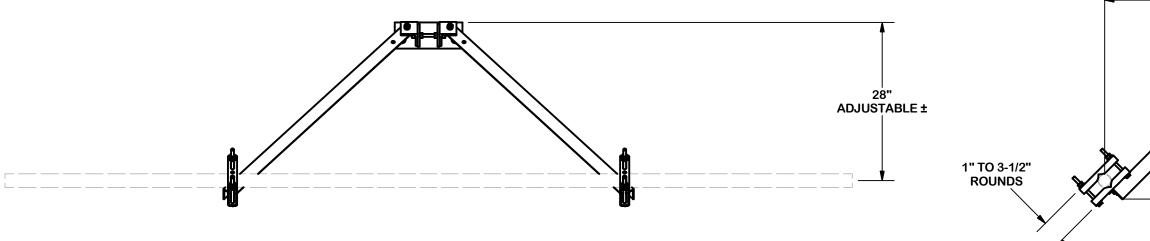

					TOLERANCE NOTES	DESCRIPTION					
				TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS ARE ± 1/2 DEGREE			SECTOR FRAI STABILIZER - VER	=			
				ALL OTHER MACHINING (± 0.030") ALL OTHER ASSEMBLY (± 0.060")	CPD NO			ENG. APPRO			
Α	CHANGED MAX, DIA, FOR HANDRAIL CONNECTION	BC	10/25/2017		5563		CEK 4/29/2014				
REV	DESCRIPTION OF REVISIONS	CPD	BY	DATE	PROPRIETARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT	CLASS			CHECKED BY		
	REVISION HISTORY		•	INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	81	01	CUSTOMER	BMC 4			



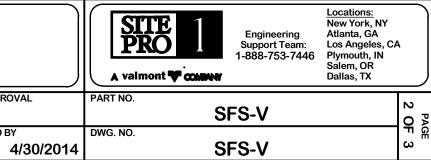

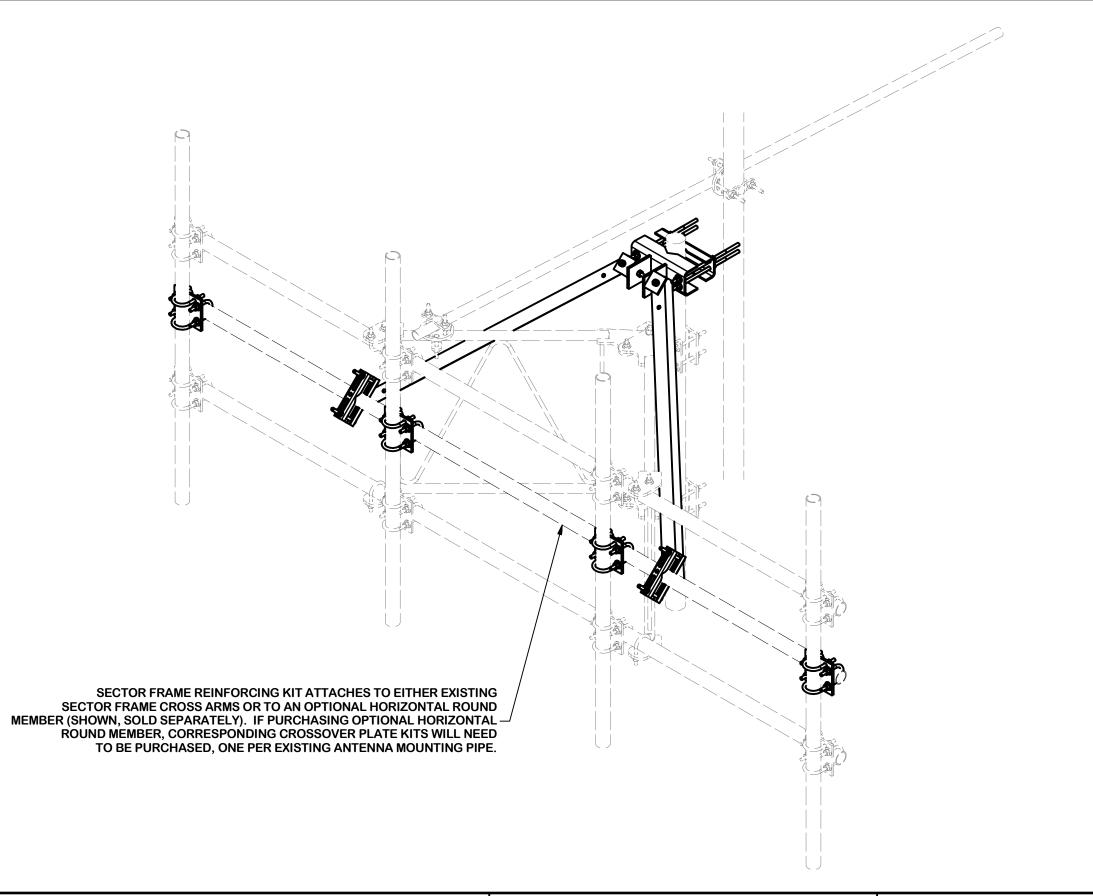

					TOLERANCE NOTES	DESCRIPTION				
				TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS ARE ± 1/2 DEGREE				SECTOR FRAME STABILIZER - VERTICAL		
					ALL OTHER MACHINING (± 0.030") ALL OTHER ASSEMBLY (± 0.060")	CPD N		DRAWN BY		ENG. APPR
Α						55	63	CEK	4/29/2014	
REV	DESCRIPTION OF REVISIONS	CPD	BY	DATE	PROPRIETARY NOTE: THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT			DRAWING U		CHECKED I
	REVISION HISTORY	INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED.	81	01	CUS ⁻	TOMER	BMC			

	A valmont V controver	Engineering Support Team: 1-888-753-7446	New York, NY Atlanta, GA Los Angeles, CA Plymouth, IN Salem, OR Dallas, TX	\	J
ROVAL	PART NO.	FS-V		30	PA
вү 4/30/2014	dwg. no.	FS-V		Ψ	PAGE