


# U-bolts

A **valmont** COMPANY

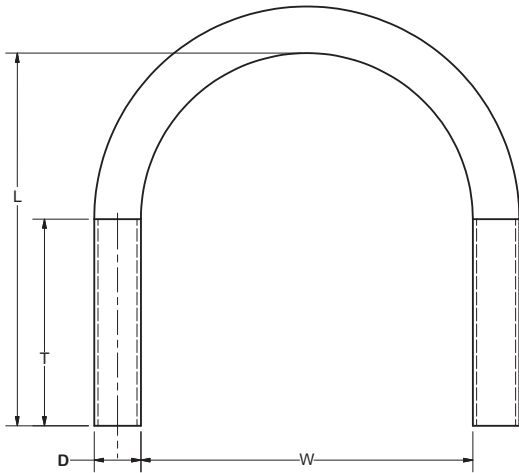

**Features:** Includes nuts, locks, and flat washers, long thread lengths. Hot-dip galvanized.

**Construction:** SAE J429 Gr. 2. Coarse threads.

**Design Criteria:** Conforms to the minimum requirements as stated in SAE J429 (Latest Revision) Grade 2 Stud, Rolled or Cut CNC threads. SAE J429 Grade 2 (Yield  $F_y = 57$  ksi / Tensile  $F_u = 74$  ksi). All finished goods are Hot Dip Galvanized in accordance with ASTM A123 requirements.

Part #	Diameter (D)	Width (W)	Length (L)	Thread (T)	Weight
UB3200	3/8"	2"	3"	1-1/4"	0.40 lb.
UB3212	3/8"	2-1/2"	3-5/8"	1-3/4"	0.45 lb.
UB3300	3/8"	3"	4-1/4"	2"	0.50 lb.
UB3312	3/8"	3-1/2"	4-3/4"	2"	0.50 lb.
UB3418	3/8"	4"	5-3/4"	2-1/2"	0.60 lb.
UB1400	1/2"	2"	4"	2"	0.65 lb.
UB1212	1/2"	2-1/2"	4-1/2"	2"	0.65 lb.
UB1300	1/2"	3"	5"	2"	0.70 lb.
UB1358	1/2"	3-5/8"	5-1/2"	3"	0.75 lb.
UB1306	1/2"	3-5/8"	6"	3"	0.80 lb.
UB1418	1/2"	4-1/8"	6"	3"	0.90 lb.
UB1458	1/2"	4-5/8"	7"	3"	0.90 lb.
UB5258	5/8"	2-5/8"	4-1/2"	2"	1.20 lb.
UB5358	5/8"	3-5/8"	6"	3"	1.45 lb.
UB5458	5/8"	4-5/8"	7"	3"	1.60 lb.