

| | | | PARTS LIST | | | |
|-----|-------|-------------|--------------------------------|-----------|-------------|---------|
| ITE | Μ QTY | PART NO. | PART DESCRIPTION | LENGTH | UNIT WT. | NET WT. |
| 1 | 2 | BP8375-12 | REAR TOWER LEG BRACKET | 8 3/8 in | 10.84 | 21.68 |
| 2 | 2 | BP1125-12 | FRONT TOWER LEG BRACKET | 11 1/4 in | 14.13 | 28.26 |
| 3 | 2 | BP425-18INT | INTERRIOR BENT PLATE | 18 in | 8.78 | 17.56 |
| 4 | 2 | BP425-18EXT | EXTERIOR BENT PLATE | 18 in | 9.14 | 18.29 |
| 5 | 4 | G58R-18 | 5/8" x 18" THREADED ROD (HDG.) | | 1.57 | 6.27 |
| 6 | 8 | A5802 | 5/8" x 2" HDG A325 HEX BOLT | | 0.27 | 2.17 |
| 7 | 12 | G58FW | 5/8" HDG USS FLATWASHER | 1/8 in | 0.07 | 0.85 |
| 8 | 16 | G58LW | 5/8" HDG LOCKWASHER | | 0.03 | 0.42 |
| 9 | 16 | G58NUT | 5/8" HDG HEAVY 2H HEX NUT | | 0.13 | 2.08 |
| | | | | | TOTAL WT. # | 97.56 |



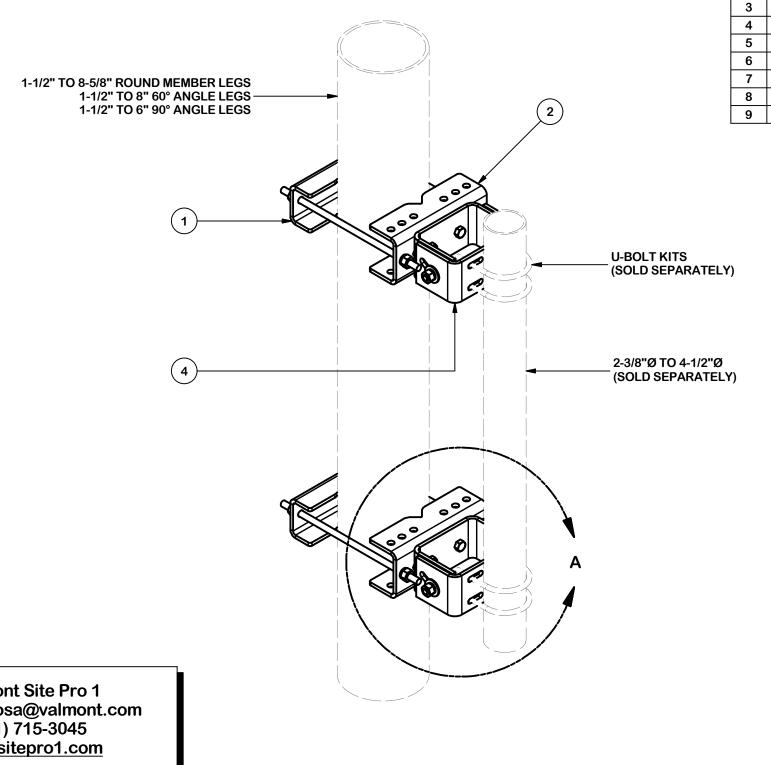

| TOLERANCE NOTES | DESCRIPTION | | | | | |
|---|-------------|-----------------------------|-----------------|-----------|------------|-------|
| TOLERANCES ON DIMENSIONS, UNLESS OTHERWISE NOTED ARE: SAWED, SHEARED AND GAS CUT EDGES (± 0.030") DRILLED AND GAS CUT HOLES (± 0.030") - NO CONING OF HOLES LASER CUT EDGES AND HOLES (± 0.010") - NO CONING OF HOLES BENDS AND ANGLES ARE ± 1/2 DEGREE | | VZW SMART LEVELING PIPE KIT | | | | |
| ALL OTHER MACHINING (± 0.030") | CPD NO | Э. | DRAWN B | Υ | ENG. APPF | ROVAL |
| ALL OTHER ASSEMBLY (± 0.060") | | | CSL | 3/26/2020 | | 5/10 |
| | CLASS | SUB | B DRAWING USAGE | | CHECKED BY | |
| THE DATA AND TECHNIQUES CONTAINED IN THIS DRAWING ARE PROPRIETARY INFORMATION OF VALMONT INDUSTRIES AND CONSIDERED A TRADE SECRET. ANY USE OR DISCLOSURE WITHOUT THE CONSENT OF VALMONT INDUSTRIES IS STRICTLY PROHIBITED. | 87 | 02 | CU | STOMER | BMC | 5/10 |

Valmont Site Pro 1 Lori.Espinosa@valmont.com (631) 715-3045 www.sitepro1.com

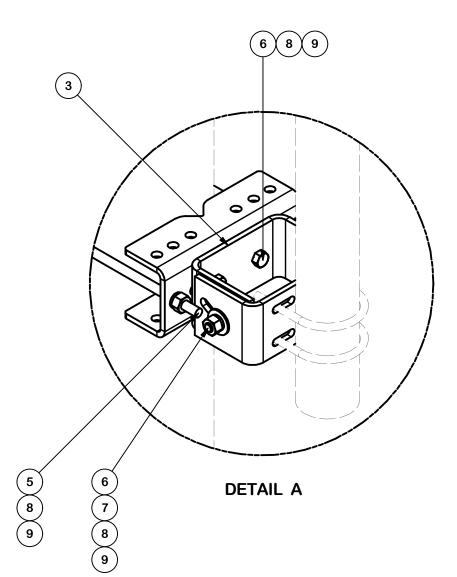